




 **Dura Coat**

**WOODTECH RANGE**  
WOOD COATING SOLUTIONS



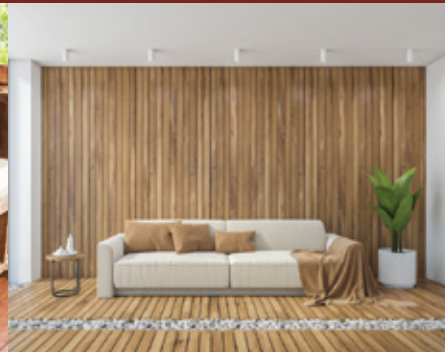

## **SELECTING THE RIGHT WOOD**

A great woodwork starts with selecting the right wood. It is important to select a well-seasoned wood with a moisture content below 12%. When the moisture content is high it impacts the core wood in different ways where it can cause bow, crook, cut and twist in a piece of timber. When it comes to wooden furniture this can also lead to peeling off the wood coating.

## **PREPARATION OF THE WOODEN SURFACE**

Preparation of the wooden surface is very important to get a superior finish. Sand the surface along the grains using 80 grit emery paper followed by smooth sanding with 100 & 180 or 220 grit emery paper. Clean the surface and ensure it is free from dust before application.



## SELECTING THE RIGHT PRODUCT


Different wooden surfaces require different properties to protect the wood. Selecting the right product solves most of the problems and will lead to better painting experience and financial benefits. Applying the same product for both exterior and interior wooden surfaces is a common practice.

There is a significant difference in the properties present in the interior and exterior products. The pricing for the products also varies based on their composition. Using exterior products on interior surfaces to save money is not advisable. Similarly, an interior product can not offer superior performance on exterior surfaces - and another point to note is the damage that it can cause to wooden surfaces when not applied correctly.





## WOODTECH RANGE

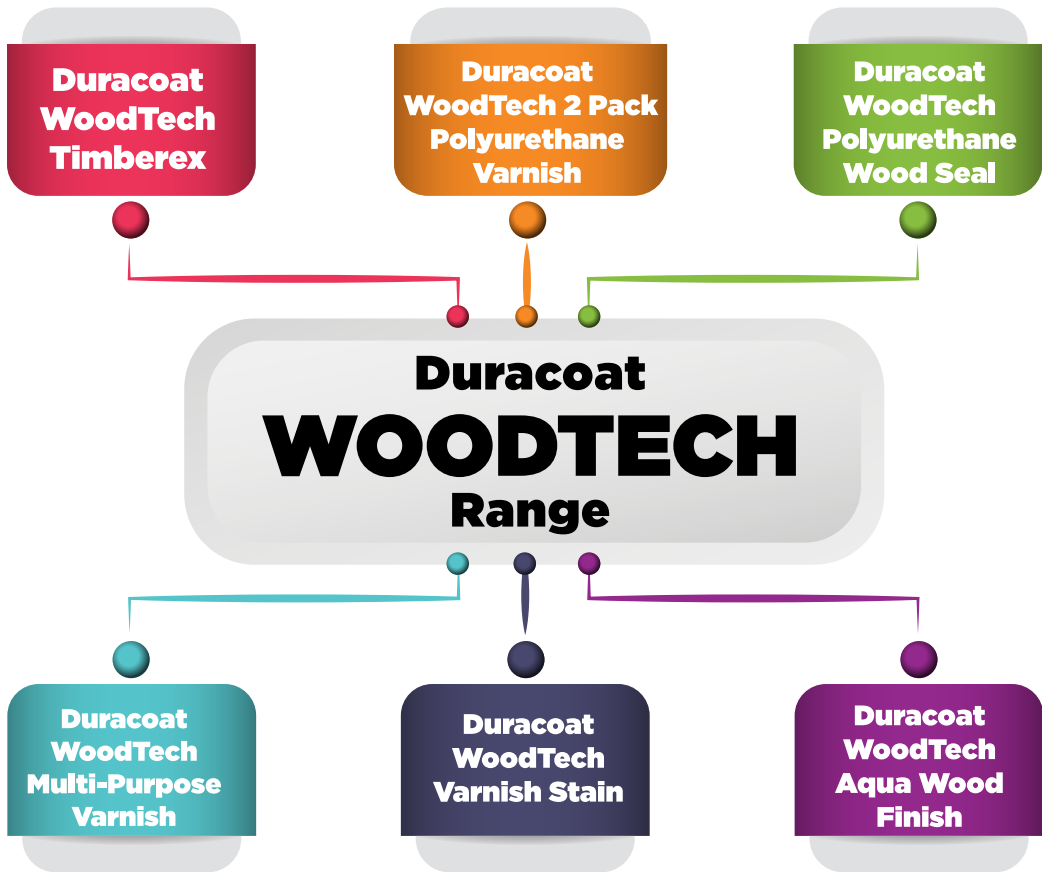

# Solvent Based Preservative Wood Stain



## Duracoat WoodTech Timberex

### Product Description

Duracoat WoodTech Timberex is a superior quality, low odour oil based wood preservative/ stain which is absorbed deeply into the timber to provide exceptional protection against wood rotting, fungi and wood destroying insects.

### Features

 For Interior & Exterior surfaces	 Single Coat Hiding
 Excellent water repellency	 Deep penetration and superior adhesion
 Long lasting wood preservative	 Enhanced grain pattern visibility

### Finish

Matt to Semi Matt

### Application Areas


Suitable for interior and exterior wooden surfaces and all types of wood



### Shades Available

Walnut, Mahogany, Seafoam, Wedgewood Blue, Teak Brown, Weathered, Woodland Green, Cedar, Pine, Golden Sand, Outside White, Ebony, Redwood, Harvest and Bronze

## Application Method

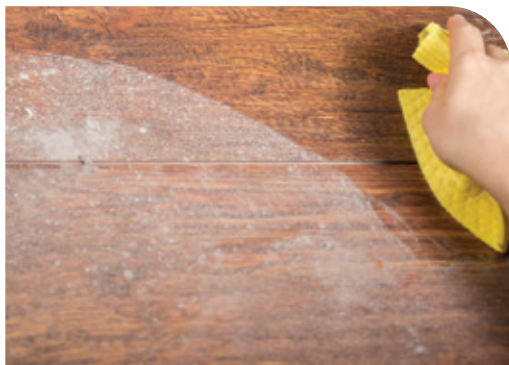

### STEP 1

Surface to be clean, dry and free from oil or wax



### STEP 2

Stir well before use



### STEP 3

Apply 1-2 uniform coats of Duracoat WoodTech Timberex by using a brush or clean cloth fabric



### STEP 4

Allow 8-10 hours drying time in between coats



# Solvent Based Varnish









## Duracoat WoodTech 2 Pack Polyurethane Varnish

### Product Description

Duracoat WoodTech 2 Pack Polyurethane Varnish is a premium quality two pack varnish. It is specially formulated to have hard mark proof film with good wear and chemical resistance.

### Features


 Excellent Flow and Levelling	 Excellent Abrasion Resistance
 Excellent Chemical Resistance	 Mark Proof Film
 Strong Adhesion	 Strong Hardness

### Finish

Gloss, Satin & Matt

### Application Areas

Suitable for Interior use, mainly for Parquet Flooring and Furniture Finish.

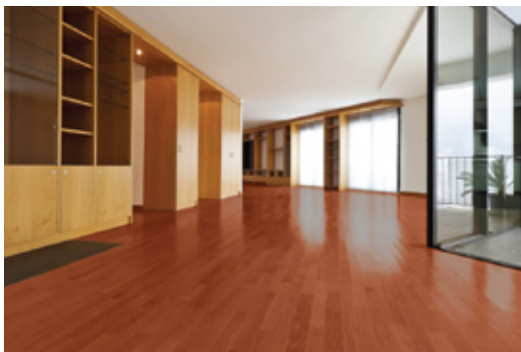

### Shades Available

Clear



## Application Method



### STEP 1

Surface to be clean, dry and free from oil or wax



### STEP 2

Mix with 3 parts of base: 1 part hardner. For ease of application dilute with 10% to 20% Duracoat WoodTech 2pack polyurethane thinner.



### STEP 3

First coat acts as a priming coat



### STEP 4

Apply 2 - 3 coats of Duracoat WoodTech 2 Pack Polyurethane Varnish by brush or spray



### STEP 5

Allow 14 hours drying time in between coats



# Solvent Based Varnish




## Duracoat WoodTech Polyurethane Wood Seal

### Product Description

Duracoat WoodTech Polyurethane Wood Seal is a single pack polyurethane varnish primarily intended for all type of interior wood work. It offers natural look to the wood and protects it from water, dilute domestic acids, alcohol and oil.

### Features

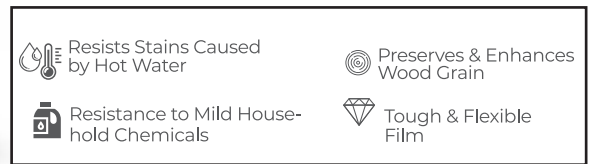

### Finish

Gloss & Matt

### Application Areas

Suitable for wood flooring work, chip board, hard board, woodwork furniture & interior timber surfaces



### Shades Available

Clear, Mahogany, Walnut, Light Oak, Mid Oak and Dark Oak

## Application Method



### STEP 1

Surface to be clean, dry and free from oil or wax



### STEP 2

Apply one coat of Basco NC Sanding Sealer



### STEP 3

Allow to dry for 2 – 3 hours



### STEP 4

Sand the surface using emery paper, wipe off the dust and dirt



### STEP 5

Apply 2 - 3 coats of Duracoat WoodTech Polyurethane Wood Seal. Allow 16 - 18 hrs drying time in between coats. For ease of application dilute with 10% to 20% of Duracoat white spirit



# Solvent Based Varnish



## Duracoat WoodTech Multi Purpose Varnish

### Product Description


Duracoat WoodTech Multi-Purpose Clear Varnish is a single pack varnish based on alkyd modified polyurethane resin to produce tough gloss finish on interior woodwork.

### Features

 Preserves & Enhances Wood Grain

 Excellent Penetration

 Excellent Adhesion


 Easy to Apply

### Finish

Gloss

### Application Areas

Suitable for interior furniture, new or sanded door panels & frames, skirting boards and wall partitions.

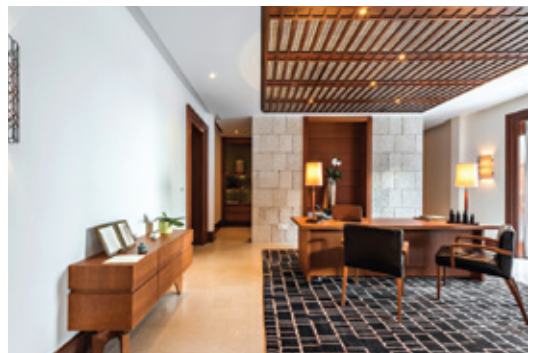

### Shades Available

Clear

## Application Method



### STEP 1

Surface to be clean, dry and free from oil or wax



### STEP 2

Apply one coat of Basco NC Sanding Sealer



### STEP 3

Allow to dry for 2 – 3 hours



### STEP 4

Sand the surface using emery paper, wipe off the dust and dirt



### STEP 5

Apply 2 - 3 coats of Duracoat WoodTech Multi-Purpose Varnish. Allow 24 hrs drying time in between coats. For ease of application dilute with 10% to 20% of Duracoat white spirit



# Solvent Based Varnish



## Duracoat WoodTech Varnish Stain

### Product Description

Duracoat WoodTech Varnish Stain is available in gloss and matt finish, formulated for use on all types of interior timber.

### Features

- |                                 |                       |
|---------------------------------|-----------------------|
| Preserves & Enhances Wood Grain | Excellent Penetration |
| Excellent Adhesion              | Easy to Apply         |

### Finish

Gloss & Matt

### Application Areas

Suitable for interior doors, wooden skirting, furniture, newly sanded floors and timber ceiling



### Shades Available

Clear, Mahogany, Walnut, Light Oak, Mid Oak and Dark Oak

## Application Method



### STEP 1

Surface to be clean, dry and free from oil or wax



### STEP 2

Apply one coat of Basco NC Sanding Sealer



### STEP 3

Allow to dry for 2 – 3 hours



### STEP 4

Sand the surface using emery paper, wipe off the dust and dirt



### STEP 5

Apply 2 - 3 coats of Duracoat WoodTech Varnish Stain. Allow 16 - 18 hrs drying time in between coats. For ease of application dilute with 10% to 20% of Duracoat white spirit









# Water Based Wood Varnish

## Duracoat WoodTech Aqua Wood Finish

### Product Description

Duracoat WoodTech Aqua Wood Finish is the new generation 100% acrylic water based exterior durable coating. The pure acrylic resin with its own unique qualities gives outstanding beauty and protection. It also has good flow property and it protects and enhances the beauty of woodwork and furniture with a quick and easy application.

### Features

 Water Based	 Excellent Penetration
 Quick and Easy Application	 No Harmful Smell
 UV Resistance	 Long lasting wood preservative

### Finish

Gloss, Satin & Matt

### Application Areas

Suitable for interior doors, door frames, windows and exterior wood work



### Shades Available

Navajo Red, California Rustic, Mission Brown, Redwood, Cedar, Golden Sand, Harvest Gold, Outside White, Weathered, Stonehedge, Black Walnut, Coffee, Cocoa, Butternut, Chamois, Ebony, Heritage Blue, Seafoam, Woodland Green, Bronze, Beige Gray, Olive Branch, Avocado, Forest & Clear



## Application Method



### STEP 1

Sand the wooden substrate well, remove all dust



### STEP 2

Apply one coat of Duracoat WoodTech Aqua Wood Finish and let it dry for 4-6 hours



### STEP 3

Lightly sand and clean the surface.



### STEP 4






Apply additional 2 coats of Duracoat WoodTech Aqua Wood Finish. Allow 4-6 hours drying time in between coats







**Head Office: North Airport Road, Embakasi,  
P.O. Box 34424 - 00100 Nairobi, Kenya  
Helpline No: 0800 221 331**

-  **Email: [customerservice@bascopaints.com](mailto:customerservice@bascopaints.com)**
-  **[www.bascopeints.com](http://www.bascopeints.com)**
-  **[BascoPaintsKenya](https://www.facebook.com/BascoPaintsKenya)**
-  **[@bascopeints](https://twitter.com/bascopeints)**
-  **[@bascopeints](https://www.instagram.com/bascopeints)**

**THE DURACOAT  
HELPLINE  
0800 221331**  
THE NEW WAY TO ASK THE EXPERTS.

#### **HEAD OFFICE**

**Airport North Road, Embakasi  
P.O. Box: 34424-00100 Nairobi,  
Kenya.  
Tel: (020) 6823555 / 6823556 /  
6823954 / (0733) 333940 /  
(0722) 204300**

#### **DURACOAT HOME SOLUTIONS**

**Forest Road, Directly Opposite Sikh  
Union Club  
P.O. Box: 34244-00100  
Nairobi, Kenya  
Tel: (0738) 333940, (0705) 136745**

#### **DURACOAT HOME SOLUTIONS**

**Sarit Centre  
New Phase 3, Level 1  
(0705) 136749**

#### **ELDORET**

**Eldoret Paint Centre  
P.O. Box: 81-30100  
Eldoret, Kenya  
Tel: (0701) 470047 / (0701) 471447  
(0732) 416319 / (0770) 278557**

#### **KAKAMEGA**

**Old Standard Chartered Bank Building  
Junction, Opposite Bank of Baroda  
P.O. Box: 2705-50100  
Kakamega, Kenya  
Tel: (0708) 333555 / (0708) 333222 /  
(0780) 884607**

#### **KISII**

**Kisii Paint Centre  
Along Kisii-Kisumu Highway,  
Next to Cooperative Bank  
P.O. Box: 2561-4200  
Kisii, Kenya  
Tel: (0705) 136740 / (0705) 136724**

#### **KISUMU**

**Nyanza Paint Centre  
P.O. Box: 1072-40100  
Kisumu, Kenya  
Tel: (057) 2025621 / 622 /  
(0732) 800030 / (0724) 256671**

#### **MACHAKOS**

**Machakos Paint Centre  
Industrial Road, Machakos Town  
(road right behind National Cereals  
and Produce Board / KBL depot)  
P.O. Box: 34424-00100  
Nairobi, Kenya  
Tel: (0715) 913 442 / (0780) 440381/2**

#### **MERU**

**Mt. Kenya Paint Centre  
P.O. Box: 38-60200  
Meru, Kenya  
Tel: (064) 30874 / 30791 / (0724) 253379 /  
(0736) 256255**

#### **MOMBASA**

**Coastal Paint Centre  
P.O. Box: 99204-80107  
Mombasa, Kenya  
Tel: (041) 2311266 / 2311347 /  
(0733) 975571 / (0703) 744644**

#### **NAKURU**

**Rift Valley Paints Centre  
P.O. Box: 4386-20100  
Nakuru, Kenya  
Tel: (051) 2212166 / (0703)744622 /  
(0737) 981767**

#### **NYERI**

**Aberdares Paint Centre  
P.O. Box: 2104-10100  
Nyeri, Kenya  
Tel: (0719) 810211 / (0780) 442245 /  
(0780) 442247**

#### **GARISSA**

**North Eastern Paint Centre  
Kismayu Road opposite Taxes Energy  
P.O. Box: 34424-00100, Nairobi, Kenya.  
Tel: (0785) 323295 / (0794) 895521**